



Wireless receiver RF Rx SW922-TCP/IP Material number: 1419241


Features/Options:

- sWave® wireless technology
- Communication via UDP or TCP/IP (Server or Client - Mode)
- Webserver based Setup


Notes

- External antenna always required for optimum wireless range

Dimensions

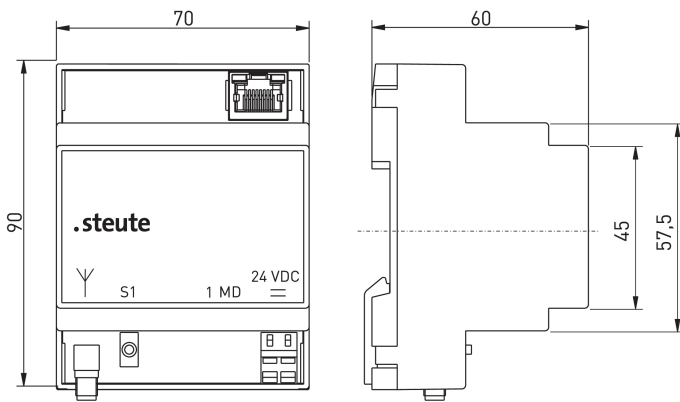

Technical data


Applied standards	EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 61000-4-2, EN 61000-4-20, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 60068-2-6, EN 60068-2-27, EN 301 489-1, EN 301 489-3, EN 300 220-1, EN 300 220-2
Degree of protection	IP 20 to IEC/EN 60529
Frequency	916.5 MHz (Japan)
Mounting	DIN rail mounting
Connection	terminals with CAGE CLAMP WAGO Series 236: 0.08 ... 2.5 mm ² / AWG 28-12, AWG 12: THHN, THWN, stripping length 5 ... 6 mm / 0.22 in
Network interface	10/100 Base-T Ethernet (Auto detection) via RJ 45
Software interface	TCP (Client, Server) / UDP / IP (DHCP)
Rated operating current/voltage I _e /U _e	max. 0.06 A/24 VDC -15 % ... +10 %
Display	green LED: Reset state orange LED: signalisation of telegram
Degree of pollution	2
Ambient temperature	0 °C ... +55 °C
Storage and shipping temperature	-25 °C ... +85 °C
Wireless approvals	Japan:  ARIB STD-T108: 204-610002

Errors and omissions excepted.



Wireless receiver
RF Rx SW922-TCP/IP
Material number: 1419241

Arrangement of receiver and switch antenna



A = Optimum mounting
B = Possible mounting
C = Unsuitable mounting

Note
Magnetic base antennae must be mounted on a metal plate of min. 250 x 250 mm size.