



Foot switch with thermoplastic enclosure


KF 1PW - 2m

Material number: 1049149 (Material number old: 88131004)

Features/Options:

- Thermoplastic enclosure
- Small flat design
- Micro switches (1-pole change over contact) for current load up to 5 A
- With pre-wired cable, cable length 2 m

Dimensions

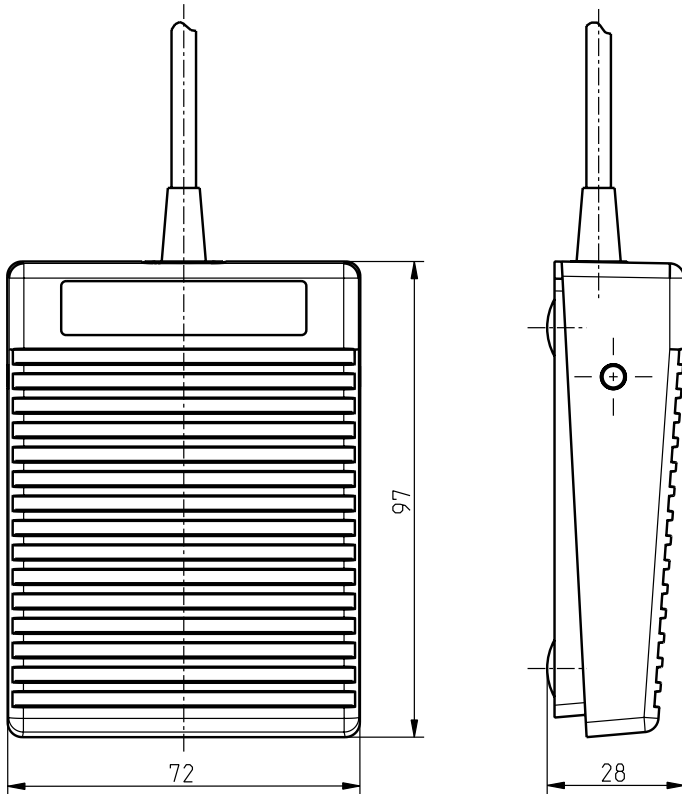

Technical data

Applied standards	EN 60947-5-1
Enclosure	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Pedal	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Degree of protection	IP 65 to IEC/EN 60529
Connection	cable 3 x AWG 20
Cable length	2 m
Cable diameter	4.8 mm \pm 3%
Cable cross-section	3 x 0.52 mm ²
Switching system	micro switch
Switching elements	1-pole change-over contact
Switching voltage	12 ... 250 VAC/DC
Switch-on current	max. 5 A
Switch-on power	max. 1250 VA
Short-circuit protection	5 A gG/gN fuse
Ambient temperature	-10 °C ... +60 °C
Mechanical life	> 1 million operations
Approvals	
Weight	220 g



Foot switch with thermoplastic enclosure

KF 1PW - 2m

Material number: 1049149 (Material number old: 88131004)

Contact diagram

