




Multi-function handle TGM-300-x x 2Ö x-L Material number: 1312345

Features/Options:

- Aluminium handle, silver matt anodised
- Long life
- Variant for right-hinged doors
- Emergency-stop push-button per EN 60947-5-5: 2-channel ⊖
- With plug-in connector M12 x 1, 12-pole


Dimensions

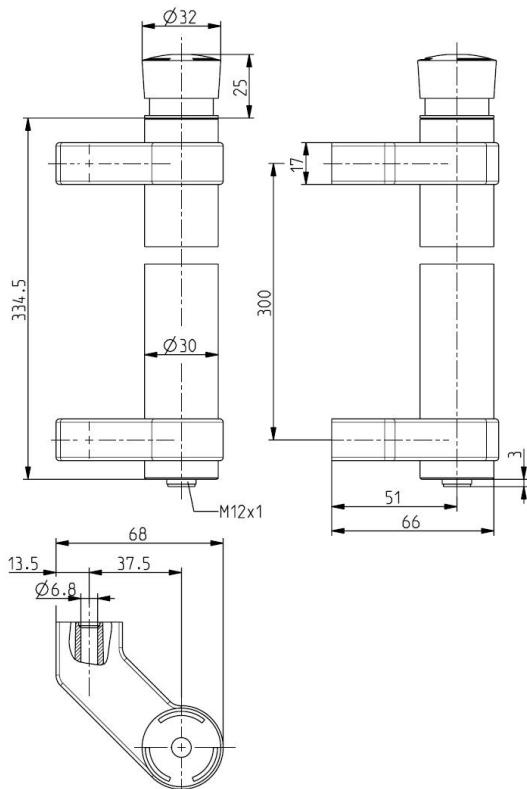


Technical data

Applied standards	EN 60947-5-1, EN 60947-5-5
Enclosure	aluminium, anodised, silver matt
Degree of protection	IP 67 to IEC/EN 60529
B_{10d} (10 % load)	100 000
T_M	max. 20 years
Connection	Plug-in-connector M12 x 1, 12-poles
Rated operating current/voltage I_e/U_e	0.5 A/24 VDC LEDs: 10 mA/24 VDC
Rated operating isolation voltage U_i	30 VDC
Degree of pollution	3
Mechanical life	> 50 000 operations
Ambient temperature	-25 °C ... +55 °C

Contact diagram emergency-stop push-button

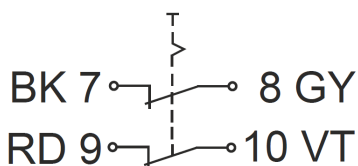

Plug-in connector

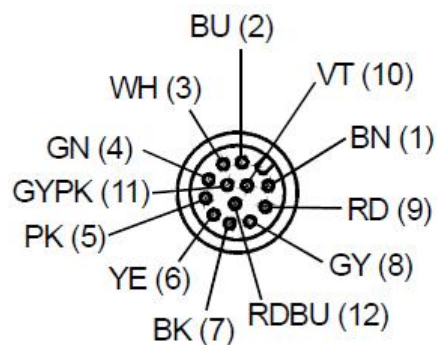

Plug-in configuration (view from plug side)
Plug-in connector M12 x 1, 12-pole

Errors and omissions excepted.