



Position switch Extreme ES 95 TK 1Ö/1S IP66 Niro Extreme Material number: 1248248

Features/Options:


- Version with higher degree of protection IP 66: From a distance of 2.5 to 3.0 m, the devices are treated with splashing water from different directions at 100 l per minute. The jet diameter is 12.5 mm, test duration is 1 min/m surface for at least 3 min.
- Screws and plunger made of stainless steel
- Salt-mist proof
- Thermoplastic enclosure
- Design to EN 50047
- Horizontally slotted mounting holes

- Double insulated
- Slow action, change-over contact with double break
- Good resistance to oil and petroleum spirit
- Actuator: Spring rod with plastic tip TK
- Wear-resistant plastic tip
- Spring rod can be actuated from any direction
- Attention: Please state required international approvals with your order!

Notes

- 1 cable gland M20x1.5 - IP 66 included in delivery

Dimensions

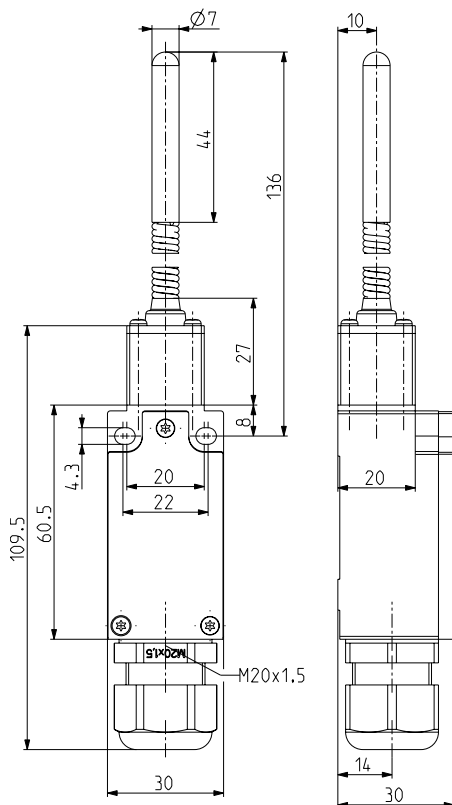

Technical data

Applied standards	EN 60947-5-1, EN ISO 14119
Enclosure	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Tightening torque	enclosure mounting screws: 1.2 ... 1.3 Nm cover screws: 0.5 ... 0.6 Nm
Degree of protection	IP 66 to IEC/EN 60529
Contact material	silver
Switching system	slow action
Switching elements	1 NC/1 NO contact, type Zb
Connection	screw connection terminals
Cable cross-section	max. 1.5 mm ² (incl. conductor ferrules)
Cable entry	1 x M20 x 1.5 (incl. 1 cable gland)
Clamping range	7 ... 10 mm
Rated impulse withstand voltage U_{imp}	4 kV
Rated insulation voltage U_i	400 V
Conventional thermal current I_{the}	6 A
Utilisation category	AC-15; DC-13
Rated operating current/voltage I_e/U_e	6 A/400 VAC; 0.25 A/230 VDC; 4 A/24 VDC
Short-circuit protection	6 A gG/gN fuse

Errors and omissions excepted.



Position switch Extreme
ES 95 TK 1Ö/1S IP66 Niro Extreme
Material number: 1248248

Technical data

Mechanical life > 1 million operations

Operation cycles max. 1800/h

Ambient temperature -20 °C ... +80 °C


Contact opening max. 2 x 3.5 mm

Approvals



Weight 102 g

Contact diagram



Switching diagram

